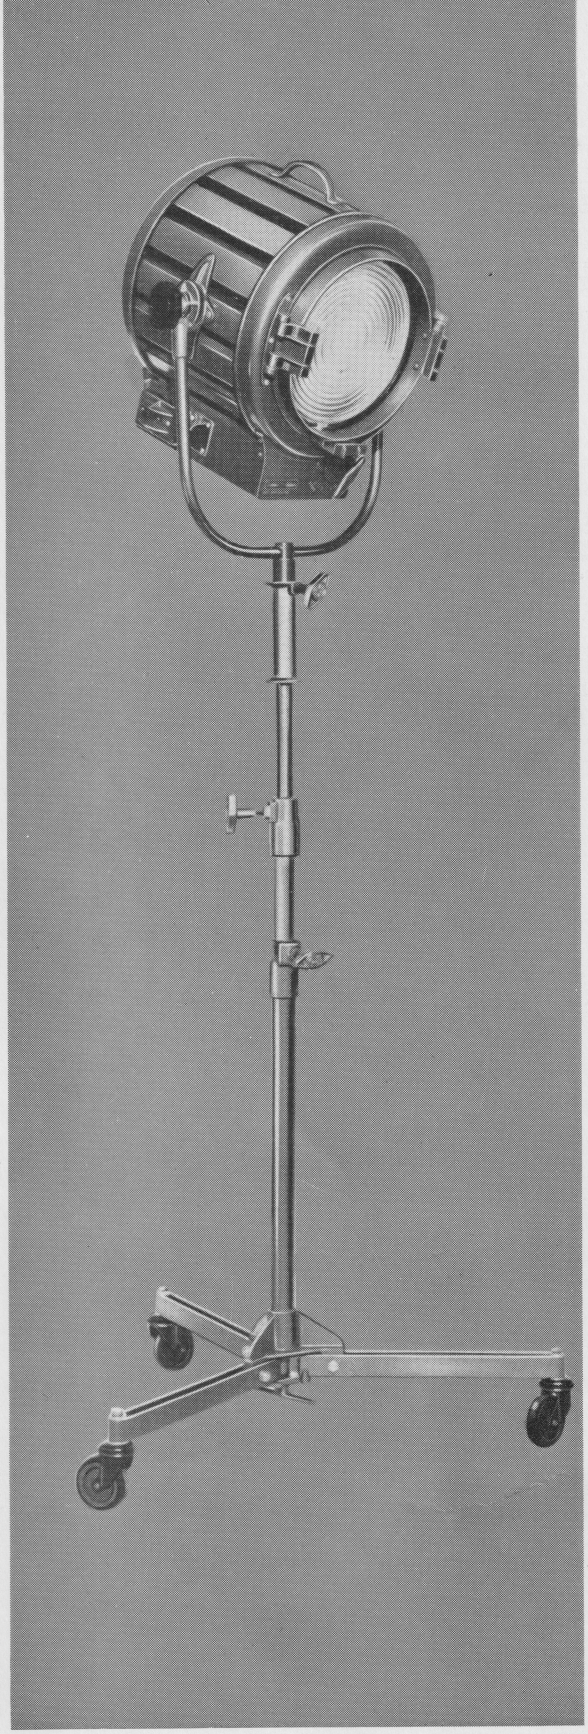

'JUNIOR' M-R TYPE 2000/2000TV

'JUNIOR' M-R Type 2,000/2,000TV

Used for all photographic purposes. Indispensable for 35 mm. filming. Invaluable for professional colour stills.

SPECIFICATION

LAMPHEAD M-R Type 2,000

CONSTRUCTION	Interlocking steel channel-pieces with steel end spinnings and cast aluminium fittings.

M-R Type 2,000TV

CONSTRUCTION	Interlocking light alloy channel-pieces with alloy end spinnings and cast aluminium fittings.
YOKE	Steel tubing, non-ferrous metal fittings with $1\frac{1}{8}$ inch diameter spud.
LENS	10 inch diameter 'Fresnel' type.
BEAM ANGLE	Variable from 12° to 44°.
REFLECTOR	$7\frac{1}{4}$ inch diameter 'Alzak' mirror.
FOCUSING	Indexed control knobs front and rear.
SWITCH	Quick make and break, toggle type fitted on lamphead.
CABLE	25 feet of 3-core rubber covered, attached to lamphead.
SOCKET	Bi-post.
BULB TYPE AND RATING	M.P. or C.T. Type Bi-post. (not included in price of lamp). 115/250 volt. 2,000 watt. Lamp Ref. S/1. 115/230 or 240 volt. 1,000/2,000 watt. Lamp Ref. C.T. 115/250 volt. 1,000 watt. Lamp Ref. S.A.

STAND M-R Type S2,000

(not included in price of lamp).

Double lift, folding type.

CONSTRUCTION	Leg members and tubes of mild steel with non-ferrous metal fittings and 3 inch rubber-tyred castors.
SOCKET DIAMETER	$1\frac{1}{8}$ inches.

MOLE-RICHARDSON